

CD60 DEHUMIDIFIER

SPECIFICATIONS

Specifications	CD60
Model No.	10264FR-US
Height	17" (432mm)
Width	20" (514mm)
Depth	14" (356mm)
Weight	80 lbs (36kg)
Voltage	110 V
Phase	1
Frequency	60 Hz
Current	7 A
Power	880W
Airflow	360cfm (608m3/hr)
Noise Level	57 dba
Refrigerant	R407c
Effective Volume	8,369 cu.ft (237m3)
Typical Extraction	56 ppd
Minimum Operating Temperature	33°F (1°C)
Maximum Operating Temperature	95°F (35°C)

Features	CD60
Model No.	10264FR-US
On/Off Control	✓
Electronic Defrost Control	✓
Compressor Type	Rotary
Fitted Mains Plug	✓
Free Standing Adjustable Feet	✓
Remote Humidistat	✓
Adjustable Control Humidistat	✓
Hot Gas Defrost System	✓
Hours Run Meter	✓
High Capacity Condensate Pump	✓
Quick Disconnect Hose Coupling	✓
25' Length of PVC Drain Hose	✓
Epoxy Powder Coating	✓

APPLICATION

The EIPL CD60 commercial / industrial dehumidifier was designed to provide energy efficient humidity control in a wide range of applications including offices, laboratories, apartments, storage areas, restaurants, bars, museums, locker rooms, computer, telecommunication rooms and basements. It is a quiet, high efficiency, high capacity unit designed to suit your HVAC needs.

KEY DESIGN FEATURES


- Adjustable control humidistat to maintain the level of dryness
- A convenient drain point for condensate collection of hose attachment
- EIP's unique "Hot Gas" defrosting feature which automatically melts away frost buildup providing effective operation at low ambient temperatures
- Rugged, epoxy powder-coated steel chassis and housing.
- Hours run meter
- Simplicity of installation and operation with a standard 115V plug
- Extra long power cord.
- High capacity, fully automatic, condensate pump



**HIGH CAPACITY • LOW TEMPERATURE
INDUSTRIAL INSTITUTIONS • RENTALS • HOMES**

HOW A DEHUMIDIFIER WORKS

1. Air is drawn into the unit by a fan
2. Air passes over a cold surface
3. As the air is cooled, its moisture condenses
4. Water falls into the container
5. Air is re-heated by the heat recovery system
6. Air passes back into room 2°C warmer and considerably dryer
7. Defrost system automatically de-ices unit as necessary
8. Unit switches off automatically when container is full
9. When the unit achieves the selected level of dryness it switches off automatically

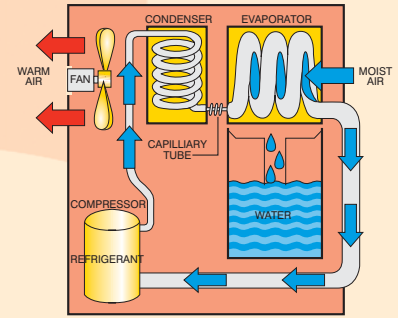

Applications	CD60
Model No.	10264FR-US
Offices	✓
Laboratories	✓
Apartments	✓
Storage Areas	✓
Restaurants	✓

Applications	CD60
Model No.	10264FR-US
Bars	✓
Museums	✓
Locker Rooms	✓
Computer Rooms	✓
Basements	✓

PROVEN PERFORMANCE

The EIPL CD60 dehumidifier is a stand alone solution to your humidity problem. The unit is supplied with a pre-wired, remote humidistat, extra long power cord and long condensate tube. This preassembly makes the installation process simplistic, thereby reducing the overall installation and project cost. The high efficiency Rotary compressor ensures the maximum extraction with the lowest running costs. Fully adjustable feet ensure the unit can be leveled quickly and accurately.

THE PROBLEM

Excess humidity in your crawl space, warehouse, office, factory or shop results in corrosion, mold growth and rotting. Enormous costs are incurred every year through damage to inventory and through inflated building maintenance costs as a result of dampness. Even if your building seems dry during the day, at night when the temperature falls the humidity rises and the condensation process begins. The compact physical size and high performance, makes the CD60 is the ideal choice for areas which require humidity control.

THE DEHUMIDIFIER

EIPL dehumidifiers are effective solutions to environmental control problems. The CD ranges of units are high capacity dehumidifiers, made to operate at high efficiencies by removing moisture from the air through the refrigeration process. The fan draws the moist air through the cold evaporator coil, which cools the air below its dew point. Moisture forms on the evaporator coil and is collected in the condensate tray, which is equipped with an internal condensate pump for easy removal of collected moisture. The cooled air then passes through the hot condenser coil where it is reheated using the same energy removed during the cooling phase, plus the additional heat generated by the compressor. The air is, therefore, discharged from the dehumidifier at a slightly higher temperature with a lower absolute humidity than that which entered. Continuous circulation of air through the dehumidifier gradually reduces the relative humidity within the area. Because the CD ranges of units are equipped with an internal humidistat, they automatically switch on and off to save energy and expense by maintaining the desired level of humidity with intermittent operation.

The additional features of the CD60 make the unit the ideal choice for installations where remote humidistat mounting is required. The high capacity condensate pump ensures the unit is capable of pumping water from basements or to higher drainage points.

