
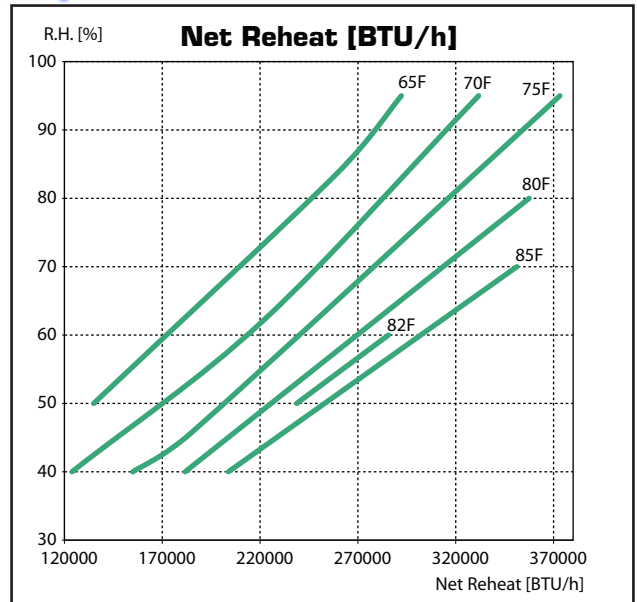
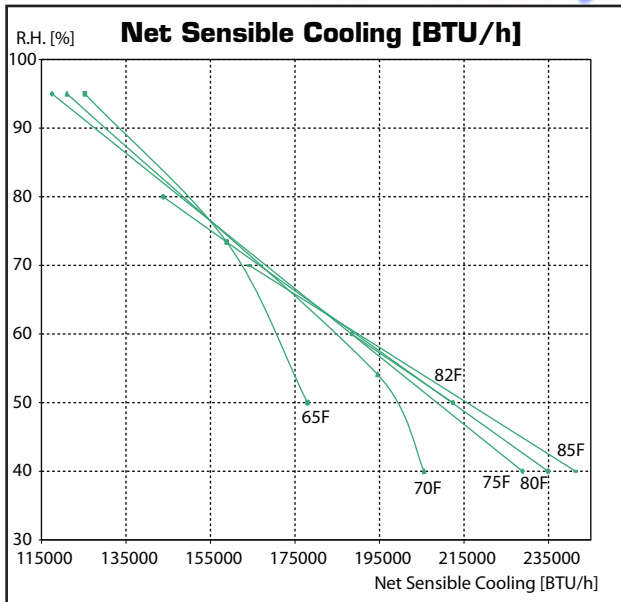


DCA 1400T DEHUMIDIFICATION SYSTEM

PERFORMANCE

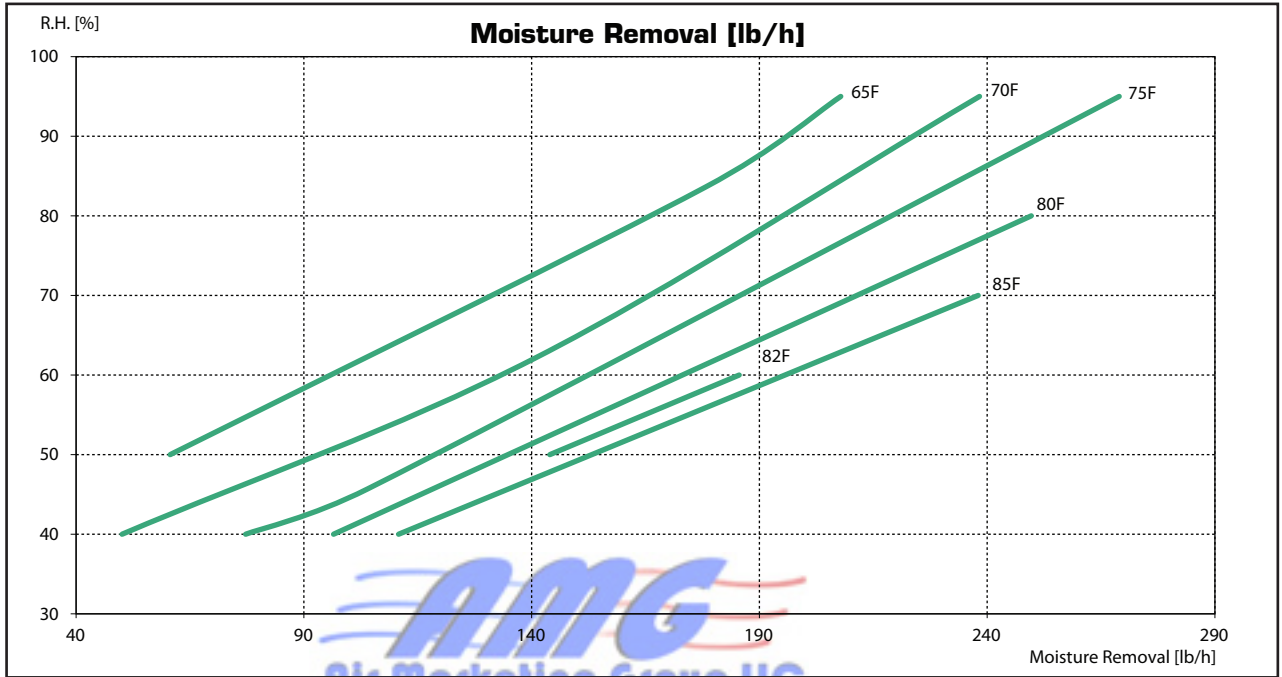

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	144.0	185.6	1
Net Sensible Cooling, MBH	212.4	188.4	2
Net Reheat, MBH	238.7	285.6	3
Water Heating - A, MBH (Water Heating Models Only)	226.5	237.5	4, 6
Water Heating - B, MBH (Water Heating Models Only)	226.5	237.5	4, 6

Notes:

1. Reheat mode assuming 1050 BTU/lb.
2. Cooling mode with remote air cooled condenser at 95F.
3. Defined as sum of latent and compressor input. Use Dehumidifier for supplemental heat only.
4. Assuming 85F entering water temperature.
5. For conditions and data not shown contact the factory.
6. For pool water usually only circuit A is required.

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifiers be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

Air Marketing Group LLC

DESIGN SPECIFICATIONS

Electrical	208/230V	460V	575V
Phase/Hz	3/60	3/60	3/60
Compressor M.B.H. A/B	181/181	181/181	181/181
Compressor RLA A/B	53.8 / 53.8	28.2 / 28.2	22.4 / 22.4
Compressor LRA A/B	340/340	173/173	132/132
Blower Motor H.P.	10.0	10.0	10.0
Blower Motor FLA	26.7	12.6	9.8
Unit FLA	136.7	70.1	55.5
Maximum Fuse Size	175	100	75
Minimum Circuit Amp.	150.2	77.1	61.1
Operating kW	38.46	37.96	37.97

CFM.....	14000
External Static Pressure	0.50" H ₂ O
Refrigerant.....	R-407C (Factory Charged A/B 80 lbs.)
Compressor Type.....	Dual Scroll
Filter (Quantity: 6).....	20" x 25" x 4" Pleated
(Quantity: 3).....	20" x 20" x 4" Pleated
Drain Connection	1" Bar Drain
DCA 14000T Weight	4000 lbs.
Liquid Inlet A/B [inches O.D.] (up to 50') ¹	0.875 / 0.875
Hot Gas Outlet A/B [inches O.D.] (up to 50') ¹	1.375 / 1.375
Water Inlet [inches O.D.]	1.625 / 1.625
Water Outlet [inches O.D.]	1.625 / 1.625
Water Flow G.P.M. ²	34 / 34
Pressure Drop (Ft. WC) ²	11.3 / 11.3

¹ Over 50ft contact factory

² Water Flow data based on 50% RH + Return Air 82°F and Pool Water at 85°F

STANDARD FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Parts Warranty
- Dual Refrigeration Circuits
- Dual Scroll Compressors
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control
- Remote Condenser Ready



- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System
- Motorized Evaporator Bypass Damper
- ElectroFin Coated Coils

OPTIONAL FEATURES

- Right Side Component Service Access
- Top or Bottom Discharge (Not Field Convertible)
- Outdoor Installation Package
- Outdoor Make Up Air Assembly with Damper & Filter
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C Available
- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available