



High-Capacity Grow-Optimized Dehumidifier

MODEL A320V3 | SUBMITTAL SHEET

Project: _____

Architect: _____

Contractor: _____

Suppliers: _____




Dealer: _____

Engineer: _____

Location: _____

Date: _____

SPECIFICATIONS	
Capacity⁽¹⁾ (water removal)	340 ppd
Energy factor⁽¹⁾ (efficiency)	2.5 L/kWh (5.3 pints/kWh)
Voltage, Phase, Frequency	277VAC, 1 Phase, 60 Hz
Current draw⁽¹⁾	9.2 Amps
Power (Watts)⁽¹⁾	2,450 Watts
Btu/h⁽²⁾	7,900
Breaker size	20 Amps
Dimensions (cabinet only)	Width: 32 $\frac{5}{8}$ " Height: 24" Length: 24 $\frac{1}{4}$ "
Weight	180 lbs.
Control	Model A77 included
Filter	MERV 11 disposable
Refrigerant	R410A
Coil type	Copper tube, Aluminum fin with ElectroFin® E-coat
Power cord type	SJT, L7-20P, 10ft
Hardwire	Field-configurable
Duct Kit	Sold Separately (Part #5807)
Drain connection	$\frac{3}{4}$ " FNPT
Drain fittings	$\frac{3}{4}$ " MNPT x $\frac{3}{4}$ " BARB, $\frac{3}{4}$ " MNPT x $\frac{3}{4}$ " Female pipe, $\frac{3}{4}$ " FNPT x $\frac{3}{4}$ " Female pipe, $\frac{3}{4}$ " P-Trap
Warranty	5 Years on all parts including refrigeration system

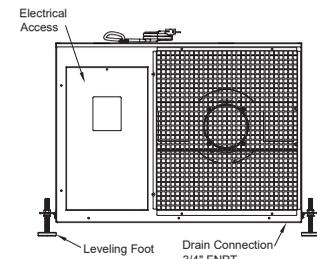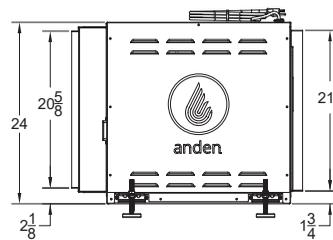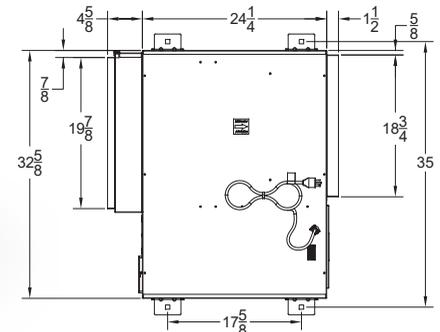

90-2428

PRINCIPLE OF OPERATION

The Anden Model A320V3 Dehumidifier is designed to dehumidify the air coming into the unit by passing the incoming air over an evaporator coil to drop the air temperature below the dew point of the air. Moisture is removed from the air and drained out of the unit to a common floor or waste drain. The air is then reheated in the condenser coil and exits the unit.

Dehumidification occurs until the set point is reached, then shuts off until the control determines a need for operation.

APPLICATION

The Anden Model A320V3 Dehumidifier is the perfect solution for the precise management of humidity required in an indoor growing environment.



⁽¹⁾Rated capacity and energy factor test done and current draw measured in accordance with AHAM DH-1 2008 at 80°F/60% RH inlet air at 0.0 ESP, 277VAC.

⁽²⁾Total cooling load @ 80°F/60% RH.

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale.