

# Specification Sheet



Model  
**E070**

Crawl Space Dehumidifier



DESIGNED &  
ASSEMBLED  
IN THE USA  
UTILIZING U.S.  
AND  
GLOBAL COMPONENTS



c  
ETL  
Intertek

## Specifications

<b>Capacity<sup>(1)</sup></b>	@ 80°F/60% RH @ 73°F/60% RH		70 ppm 53 ppm
<b>Energy Factor kW-h<sup>(1)</sup></b>	@ 80°F/60% RH @ 73°F/60% RH		2.1 L/KW-h 1.8 L/KW-h
<b>Airflow @ varying E.S.P. (external static pressure - dry coil)</b>	0.0" w.c. 0.2" w.c. 0.4" w.c.		200 CFM 170 CFM 140 CFM
<b>Voltage, phase, frequency</b>	120 VAC, 1 phase, 60 Hz		
<b>Current draw<sup>(1)</sup></b>	5.4 Amps		
<b>Noise</b>	53 dBA ducted		
<b>Dimensions (cabinet only)<sup>(2)</sup></b>	Width: 12½", Height: 12½", Length: 25"		
<b>Unit Weight Shipping Weight</b>	56 lbs. 72 lbs..		
<b>Inlet air operating conditions during</b>	Dehumidification:	50°F–104°F, 40°F dew point min.	
	Ventilation:	40°F–140°F, 0%–99% RH (non-condensing)	

## Features

- Built-in automatic digital control with display. Can be set up for dehumidification and ventilation or zoning.
- Front mounting control
- ½" EPS cabinet insulation
- Air discharge orientation at end of cabinet
- Washable MERV 8 filter (part number 5695) and 8" diameter inlet/outlet duct collars
- R32 refrigerant
- Corrosion-resistant aluminum coils
- 8' power cord (plug type); hardwire option not available
- 10°F–30°F discharge air temperature rise
- ¾" MNPT Threaded drain connection with adapters for threaded connection for plastic hose included
- 10' drain tubing
- 5-year warranty

## Principle of Operation

The AprilAire E070 Crawl Space Dehumidifier are designed to dehumidify the air coming into the unit by passing the incoming air over an evaporator coil to drop the air temperature below the dew point of the air. Moisture is removed from the air and drained out of the unit to a common floor or waste drain. The air is then reheated in the condenser coil and exits the unit. Dehumidification occurs until the set point is reached, then shuts off until periodic sampling determines a need for operation.



## Application

The E070 Dehumidifier is the perfect solution for controlling humidity in crawl spaces; protecting against structural damage, pests and mold.

## Circulation

The E070 can also be programmed to circulate the air within a crawl space. Circulating the air evens out relative humidity levels and temperature in the space, eliminating variations in the environment.


<sup>(1)</sup>Rated capacity, energy factor and current draw measured at 80°F/60% RH inlet air at 0.0 ESP.  
<sup>(2)</sup>Height does not include adjustable feet. The width excludes the filter doors and length excludes the duct collars.

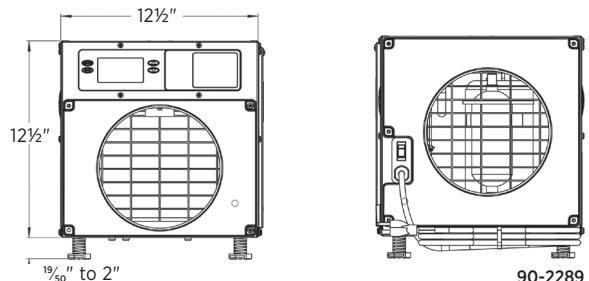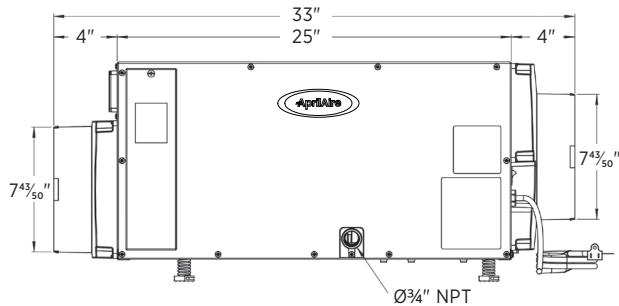

## Install Application

### Inlet and Outlet Ducted

- Ducted with 8" flex duct or hard pipe.
- Helps circulate air to equalize humidity and temperature in the space.
- Can be used with the Model 5822 Hanging Kit for installations that require the unit to be off the floor.



## Optional Accessories



### Model 4856 Condensate Pump

- 22 ft. lift
- Low profile
- 120 V



### Model 5822 Hanging Kit

- Simple pulley system installation
- Weight: 2.3 lbs.
- Supports 200 lbs.



### Model 5958 Condensate Pump Bracket

- Intuitive rail system
- No additional screws
- Threaded drain elbow



### Model 5427 Crawl Space Alert

- 40' cable with LED
- LED illuminates when the dehumidification set point can't be reached or when service is required
- Provides customer peace of mind knowing the dehumidifier is functioning properly

## Optional Wall-Mount Controls



### Model S86WMUPR

- Color Graphical Display
- Real Language Setup
- Capacitive Touch Interface
- Programmable & Non-Programmable
- Dual Fuel Capable
- Air filter and HVAC Service Reminders
- High & Low Balance Point with Outdoor Temperature Sensor
- Geofencing Capabilities



### Model 76

#### Wall Mount Dehumidifier Control

- On, Off buttons
- Wall-mounted living space control
- Displays RH and controls to an RH value
- Remote control for crawl space applications and sealed attics



### Model 8920W with IAQ Control

- Universal 3H/3C or 4H/2C HP
- Event-Based™ Air Cleaning
- Humidity and Ventilation
- 2-Part 3-Wire design
- Full-color touch screen
- Wi-Fi

## Model 76 Specifications

Electrical	External	Remote
Input voltage and current	Voltage: 24 VAC +/-20% Current: 25mA (nominal), 50mA (max.) at 24 VAC	Voltage: 35VDC (supplied by dehumidifier control board)
Output	Dry contact, normally open	Communication (RS485)
Control	External	Remote
Control range	40% 80% RH	1 (less dry)-7 (more dry) 65°F-40°F dew point
Accuracy	+/-5% RH	See dehumidifier specifications
Differential	3% RH	
Low limit	40°F dew point	50°F dry bulb, 40°F dew point min.
High limit	99°F dry bulb	105°F dry bulb