

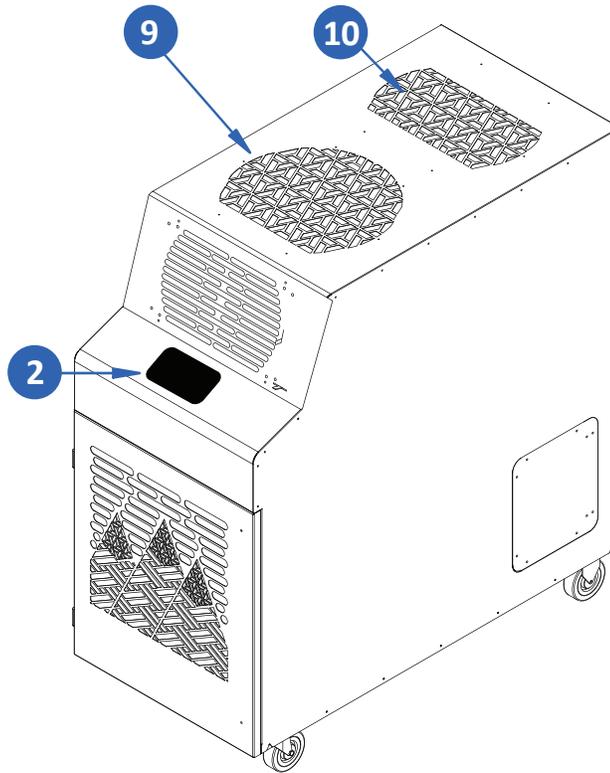
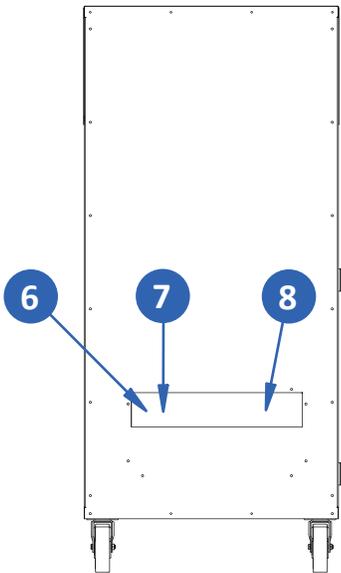


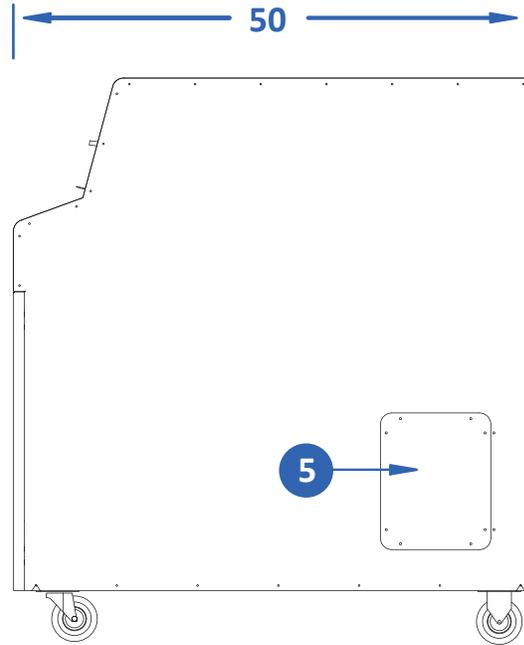

# SPECIFICATIONS

## KIB 6023-3

COOLING CAPACITY	BTU/hr @ 95F at 60% RH	60,000 (5-Ton)
COMPRESSOR DATA	Compressor Type	Scroll
	Operating Temperatures	60-110 F 50%RH
	Refrigerant	R 454 B
FAN DATA Evaporator	Fan Type (Centrifugal)	Direct Drive
	Air Flow (CFM)	2000/3 Speed
	Supply Air Device	Adjustable Vent
	Supply Air Chute Kit (optional)	2 - 10" Dia. x 24" Length
Condenser	I/O Integral Condenser	Balanced Air Flow
	Fan Type (Centrifugal)	Direct Drive
	Air Flow (CFM)	3500
	Condenser Duct Specs (optional)	2 - 18" Dia. x 8' Length
	Condenser Duct Max. Length	25'
ELECTRICAL DATA	Power Supply (Volts)	230 Three Phase
	Current Consumption (Amps)	28.4
	Power Consumption (kW)	10.17
	Maximum Circuit Breaker (Amps)	50
	Recommended Breaker Size (Amps)	40
	Minimum Circuit Ampacity(Amps)	32.575
	Min./Max. Voltage	195-250
	Power Cord Gauge/Length	8 AWG/10'
Plug Configuration	Field Supplied	
DIMENSIONAL DATA	Width x Depth x Height (Inches)	27" x 50" x 54"
	Weight (Lbs.)	523
	Shipping Weight (Lbs.)	573
	Ceiling Kit Weight (Lbs.)	56
	Shipping Weight w/ Ceiling Kit	629
SAFETY DEVICE DATA	Compressor Overload	Internal
	Fan Motor Overload	Automatic Internal
	Evaporator Freeze Protection	Hot Gas Bypass
	High Pressure Switch	Manual
	Low Pressure Switch	Automatic
	Compressor Short Cycle	Yes
	Automatic Restart	Yes
	Thermostat Type	Microprocessor/Digital
	Condensate Pump Overflow	Yes
Condensate Tank Overflow	Yes	

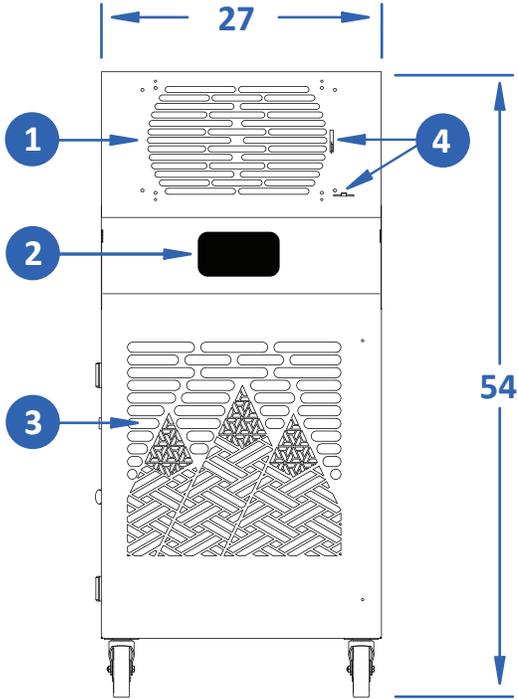

## KIB6023-3

- |                         |                          |
|-------------------------|--------------------------|
| 1. Cold Air Supply      | 6. Condensate Nipple     |
| 2. Kool Pad Control Pad | 7. Condensate Alarm Jack |
| 3. Cold Air Return      | 8. Cord Storage          |
| 4. Vent Control         | 9. Condenser Air Inlet   |
| 5. Access Door          | 10. Condenser Air Outlet |



[KWIKOOL.COM](http://KWIKOOL.COM)