

PERFORMANCE


| | | |
|-----------------------|----------------|----------------|
| °F %RH | 80 60 | 75 50 |
| Water Removal (P/Day) | 746 | 530 |
| Efficiency (P/kWh) | 7.3 | 5.0 |
| Energy Factor (L/kWh) | 3.5 | 2.4 |

ELECTRICAL


| | |
|----------------------------|-------------------|
| °F %RH | 80 60 |
| Supply Voltage | 480V |
| Current Draw | 6.5A |
| MCA* | 10A |
| MOP* | 15A |
| Recommended Breaker Size | 10A |
| Power | 4,300W |
| Power Cord | Hardwire, no cord |
| CFM | 1,750 |
| BTU (Total) | 48,400 |
| BTU (Heat of Condensation) | 33,900 |
| BTU (Motor Load) | 14,500 |

SPECS

| | |
|------------------------|---|
| Control Type | External control required (not provided) |
| Refrigerant Type | R410a |
| Refrigerant Amount | 6 lb 4 oz |
| Weight | 340 lb |
| Air Filter MERV Rating | MERV-13 |
| Dimensions | 18" x 20" x 2" |
| Drain Port Connection | 3/4" Threaded NPT |
| Operating Temperature | 56 F Min-95 F Max |

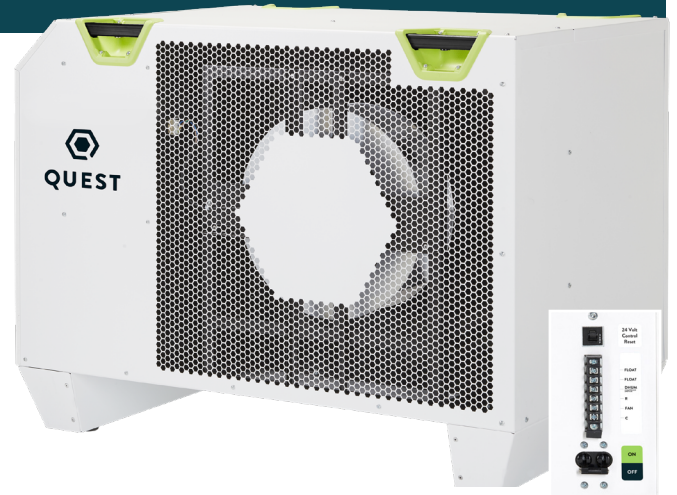

DIMENSIONS

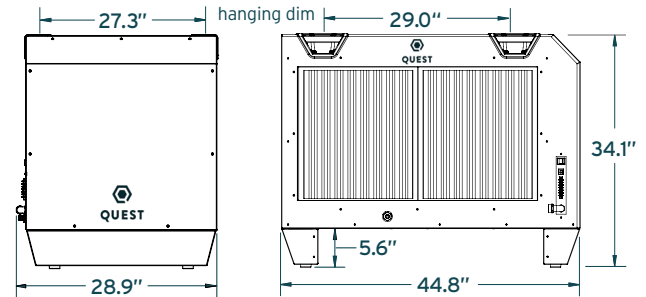

FEATURES

- + **Patented M-CoRR Technology:** Achieves the highest efficiency in its class
- + **Superior MERV-13 Filtration:** Removes harmful contaminants from the air, such as mold, bacteria and some viruses
- + **Integrated Hang Points** and handles allows for easier movement and flexible installation
- + **Low Amp Draw**, putting less load on the grid and freeing up electricity for other equipment
- + **Auto-Restart** to previous settings after loss of power

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.