
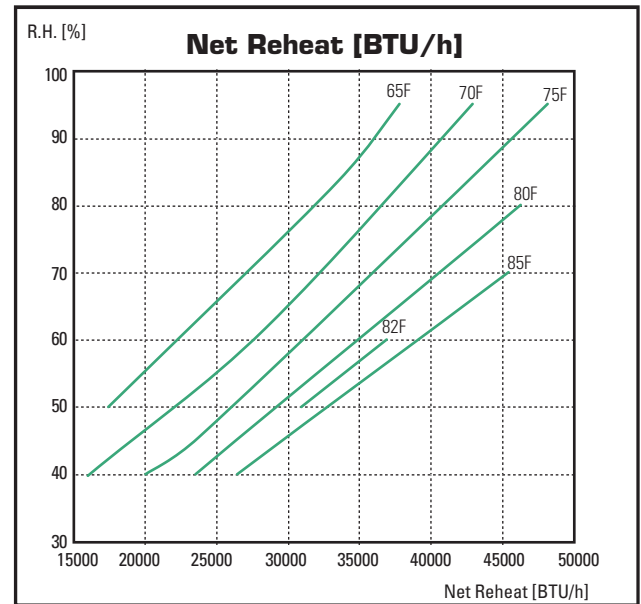
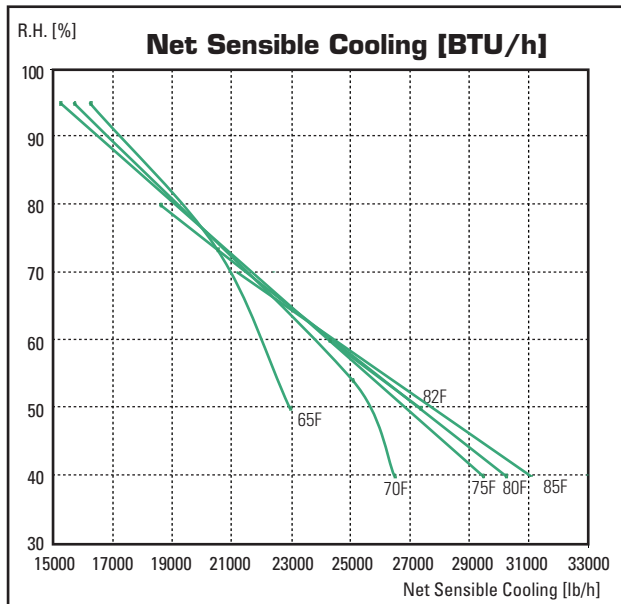


DCA 2000T AIR COOLED - NON WATER HEATING DEHUMIDIFIER

DCA 2000TWH WATER HEATING ASSIST DEHUMIDIFIER

PERFORMANCE

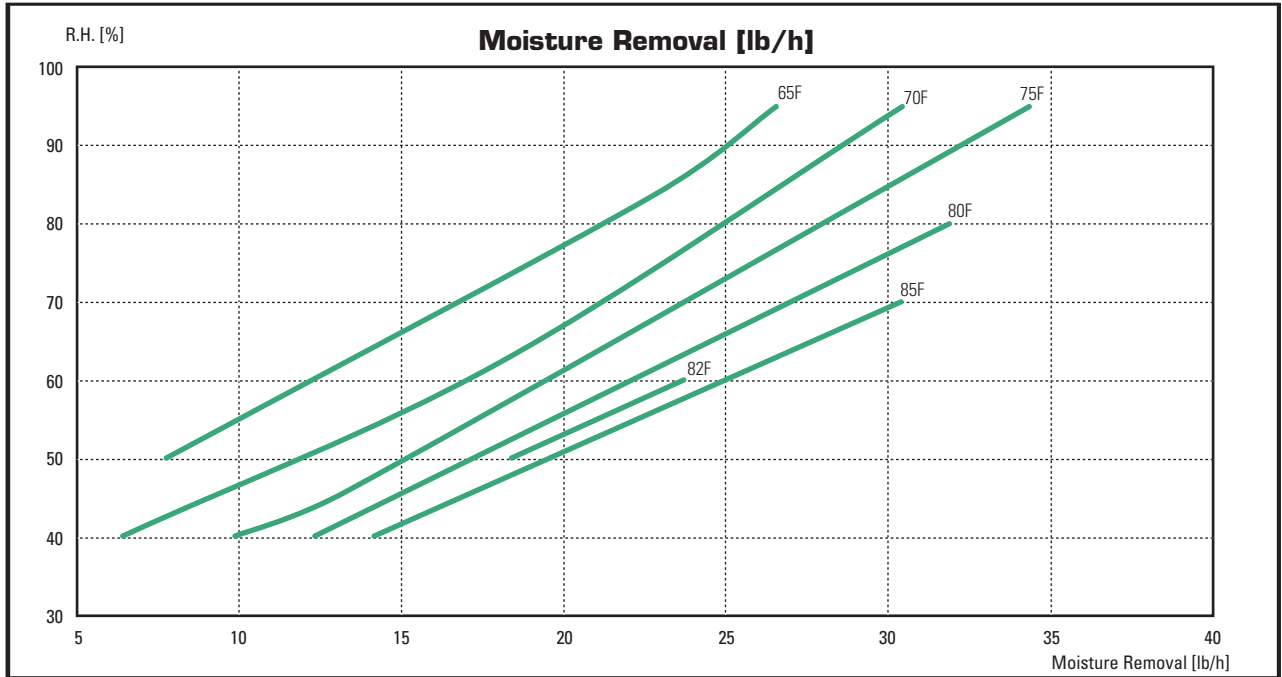

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	18.6	24.0	1
Net Sensible Cooling, MBH	27.5	24.4	2
Net Reheat, MBH	30.9	36.9	3
Water Heating, MBH (Water Heating Models Only)	58.6	61.4	4

Notes:

1. Reheat mode assuming 1050 BTU/lb.
2. Cooling mode with remote condenser at 95F.
3. Defined as sum of latent and compressor input. Use dehumidifier for supplemental heat only.
4. Assuming 85F entering water temperature.
5. For conditions and data not shown contact the factory.

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifiers be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

DESIGN SPECIFICATIONS

Electrical	208/230V	208/230V	460V	575V
Phase/Hz	1/60	3/60	3/60	3/60
Compressor B.T.U.	46,200	46,800	46,800	46,800
Compressor RLA	21.8	15.4	7.1	5.2
Compressor LRA	137	114	58	37
Blower Motor H.P.	1.5	1.5	1.5	1.5
Blower Motor FLA	7.7	5.0	2.5	1.9
Unit FLA	31.0	21.9	10.4	7.8
Maximum Fuse Size	45	30	17.5	12
Minimum Circuit Amp.	36.5	25.8	12.2	9.1
Operating kW	5.15	5.07	5.10	4.95

CFM.....	2000
External Static Pressure	0.50" H ₂ O
Refrigerant.....	R-407C (Factory Charged 25 lbs.)
Compressor Type	Scroll
DCA 2000T Filter (Quantity: 2)	18" x 25" x 1" Fiberglass
DCA 2000TWH Filter (Quantity: 2)	20" x 25" x 1" Fiberglass
Drain Connection	1" Bar Drain
DCA 2000T Weight	540 lbs.
DCA 2000TWH Weight	700 lbs.
Liquid Inlet [inches O.D.] (up to 50') ¹	0.5
Hot Gas Outlet [inches O.D.] (up to 50') ¹	0.75
Water Inlet [inches O.D.].....	1.125
Water Outlet [inches O.D.].....	1.125
Water Flow G.P.M. ²	9
Pressure Drop (Ft. WC) ²	9.3

¹ Over 50ft contact factory

² Water Flow data based on 50% RH + Return Air 82°F and Pool Water at 85°F

STANDARD FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Parts Warranty
- Single Refrigeration Circuit
- Single Scroll Compressor
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control

- Remote Condenser Ready
- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System (WH Models Only)
- ElectroFin Coated Coils

OPTIONAL FEATURES

- Right Side Component Service Access
- Top or Bottom Discharge (Not Field Convertible)
- Extended Surface Filters 2" & 4"
- Outdoor Installation Package
- Outdoor Make Up Air Assembly with Damper & Filter
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C Available

- Motorized Evaporator Bypass Damper
- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available

