
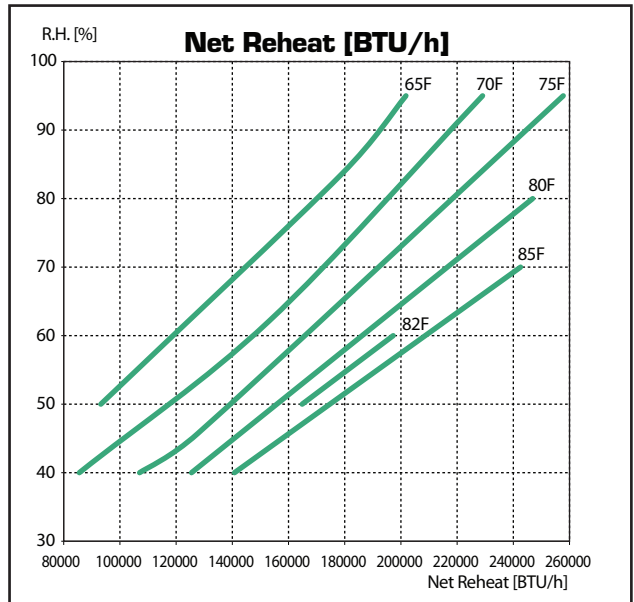
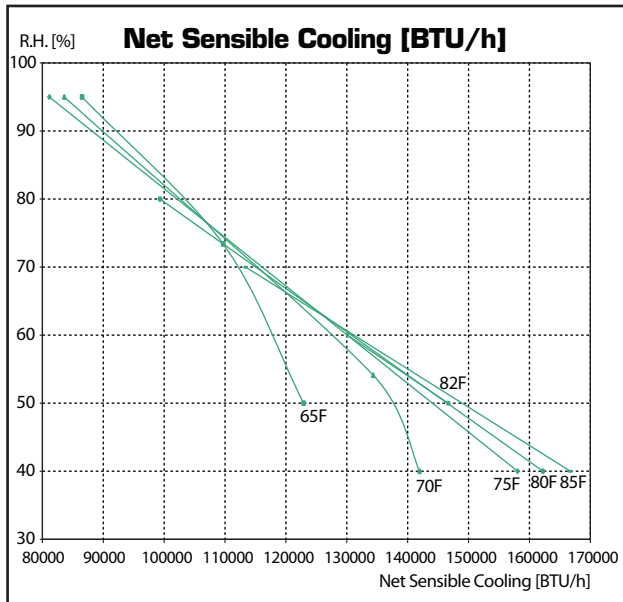


DCA 900T DEHUMIDIFICATION SYSTEM

PERFORMANCE

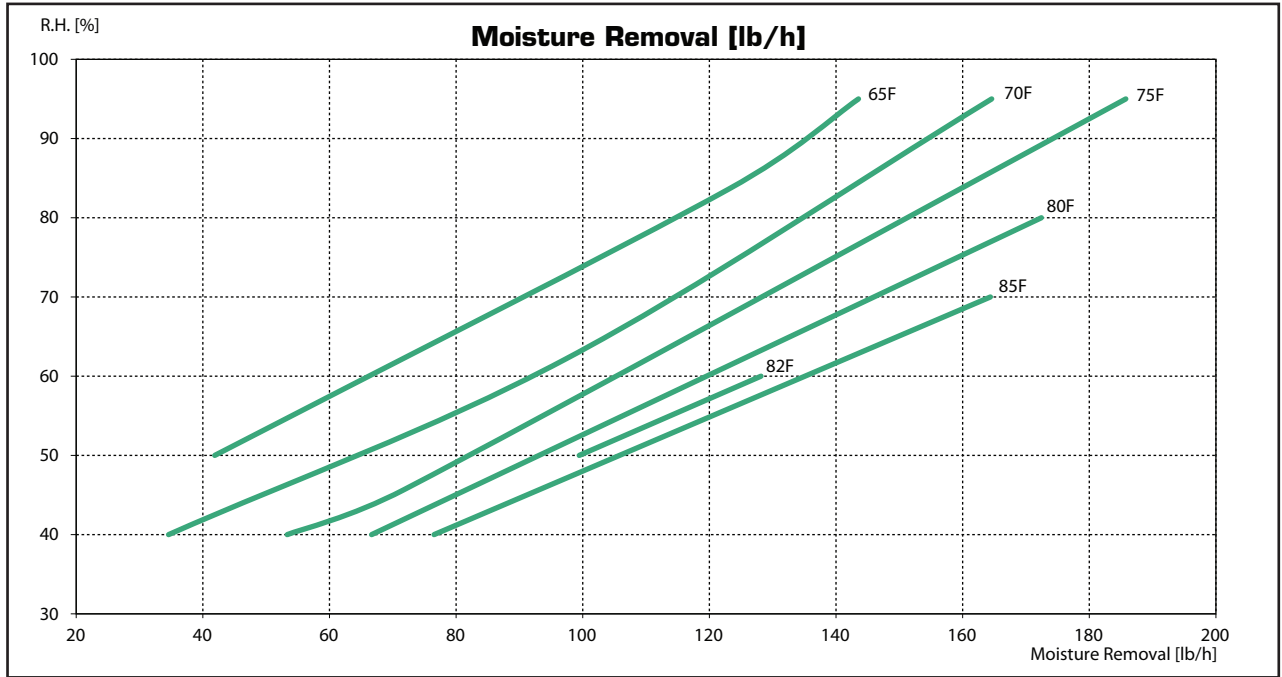

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	99.5	128.2	1
Net Sensible Cooling, MBH	146.7	130.1	2
Net Reheat, MBH	164.9	197.3	3
Water Heating - A, MBH (Water Heating Models Only)	156.4	164.0	4, 6
Water Heating - B, MBH (Water Heating Models Only)	156.4	164.0	4, 6

Notes:

1. Reheat mode assuming 1050 BTU/lb.
2. Cooling mode with remote air cooled condenser at 95F.
3. Defined as sum of latent and compressor input. Use Dehumidifier for supplemental heat only.
4. Assuming 85F entering water temperature.
5. For conditions and data not shown contact the factory.
6. For pool water usually only circuit A is required.

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifiers be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95 F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

DESIGN SPECIFICATIONS

Electrical	208/230V	460V	575V
Phase/Hz	3/60	3/60	3/60
Compressor M.B.H. A/B	125/125	125/125	125/125
Compressor RLA A/B	37.2 / 37.2	17.2 / 17.2	12.4 / 12.4
Compressor LRA A/B	239/239	125/125	80/80
Blower Motor H.P.	7.5	7.5	7.5
Blower Motor FLA	22.4	10.8	8.5
Unit FLA	99.0	46.2	34.2
Maximum Fuse Size	125	60	45
Minimum Circuit Amp.	108.3	50.5	37.3
Operating kW	25.58	25.35	25.79

CFM.....	9000
External Static Pressure	0.50" H ₂ O
Refrigerant.....	R-407C (Factory Charged A/B 65 lbs.)
Compressor Type.....	Dual Scroll
Filter (Quantity: 6).....	20" x 25" x 4" Pleated
Drain Connection	1" Bar Drain
DCA 9000T Weight	2900 lbs.
Liquid Inlet A/B [inches O.D.] (up to 50') ¹	0.75 / 0.75
Hot Gas Outlet A/B [inches O.D.] (up to 50') ¹	1.125 / 1.125
Water Inlet [inches O.D.]	1.375 / 1.375
Water Outlet [inches O.D.]	1.375 / 1.375
Water Flow G.P.M. ²	23 / 23
Pressure Drop (Ft. WC) ²	8.6 / 8.6

¹ Over 50ft contact factory

² Water Flow data based on 50% RH + Return Air 82°F and Pool Water at 85°F

STANDARD FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Parts Warranty
- Dual Refrigeration Circuits
- Dual Scroll Compressors
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control
- Remote Condenser Ready

- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System
- Motorized Evaporator Bypass Damper
- ElectroFin Coated Coils

OPTIONAL FEATURES

- Right Side Component Service Access
- Top or Bottom Discharge (Not Field Convertible)
- Outdoor Installation Package
- Outdoor Make Up Air Assembly with Damper & Filter
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C Available

- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available

